

# TRANSAXLES & POWER DRIVE UNITS Made in Italy



IDEAS IN MOTION



# ASYNCHRONOUS MOTOR IO.OKW



## Technical Specifications

Motor Type	Asynchronous
Rated Power	10,0 kW
Service	S2 60 Minutes
Rated Voltage	80V
Stator Execution	3 Phase - 4 Poles
Protection Class	IP20
Cooling	Self - Vortex System
Insulation	Class F
Weight	43 Kg
Cast Housing	Lightweight Aluminium Alloy
Encoder Type	Hall Effect 64 Pulse
Encoder Protection	IP 66
Thermal Protection	Temperature Sensor KTY 84-130
Standard Connectors	AMP Superseal

## ASYNCHRONOUS MOTOR IO.OKW

#### **Features**

- Compact Size
- High Efficiency
- Precise Control
- Maintenance Free
- Low Noise Operations
- Made in Italy Product
- Aluminium squirrel cage rotor
- Protected Terminal Block
- Ambient Temperature -20 + 60°C
- Complies with CE Standards
- UL Design Available on Request
- ATEX Version Available on Request
- 72V Execution available on Request


#### **Dimensions**



**AVAILABLE FOR TX2** 




#### **Standard Motor Curve**

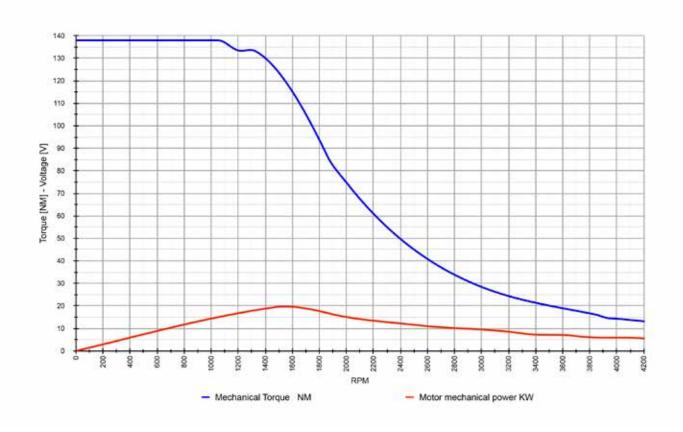



### Designed & Manufactured in Italy

### our products are sold in 40 countries across 5 continents

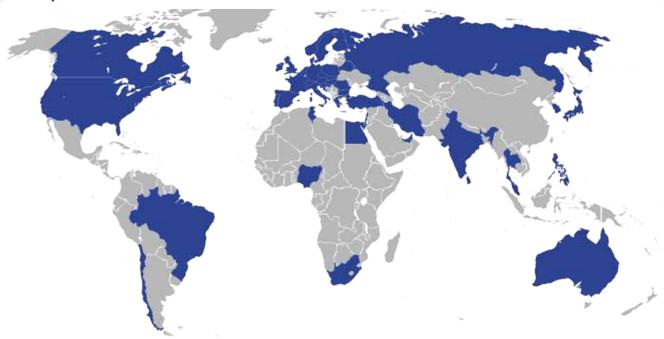

Abu Dabhi
Austria
Australia
Belarus
Belgium
Brazil
Bulgaria
Canada
Chile
Croatia
Czech Republic

Denmark
Dubai
Finland
France
Germany
Hungary
India
Iran
Ireland
Israel
Italy

Japan
Lebanon
The Netherlands
Nigeria
Norway
Philippines
Poland
Portugal
Romania
Russia
Singapore

Slovenia
South Africa
South Korea
Spain
Sweden
Switzerland
Thailand
Tunisia
Turkey
United Kingdom
U.S.A.







